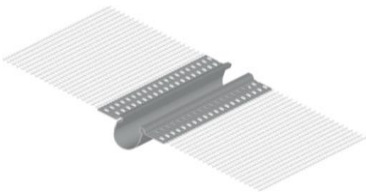


## Movement joint profile

Product:	Movement joint profile	
Supplier:	MASTERPLAST Kft., 8143 Sárszentmihály, Árpád u. 1/a. (www.masterplastgroup.com)	
Size, packaging:	2,5 m/bead	
Application:	Movement joint profile for expansion joints of external thermal insulation systems (ETICS). Embedded in the base coat, it prevents the entry of pollution and humidity in the thermal insulation. Suitable to all insulation thicknesses.	
Material:	Extruded and perforated PVC profile with bonded fiberglass mesh and soft pvc centre part.	

Properties	Relevant standards	Technical data
Thickness of PVC profile	MDV	~1,1mm
Width of PVC centre part	MDV	40 mm
Length of PVC profile	MDV	250 cm
Width of fiberglass mesh	MDV	10+10 cm (±0,5cm)
Applicable joint width	MDV	10-25 mm

**Storage and handling**  
Under dry conditions, protected against atmospheric exposure, especially sun-radiation and other heat sources as well as against rain, horizontally laid.

**Guarantee, warranty**  
In accordance with the current legislations and the conditions of the distributor. The observation of the application rules of the product and presentation of the invoice constitute a prerequisite for possible future warranty claims.

**Standards, specifications**  
Guidelines regarding the planning (Hungarian Building Chemistry- and Plaster Association – MÉSZ, 2012) and application (MÉSZ, 2014) of external thermal insulation systems (ETICS), furthermore instruction guidances of Thermomaster thermal insulation systems must be considered.

**Health and safety**  
No labelling required in accordance with the relevant regulation (EC) No. 1907/2006 of the European Parliament and of the Council (REACH).

This datasheet corresponds to our current knowledge, experiences and general informations on the subject, but may be revised as new knowledge and/or experience becomes available. It does not imply any legally binding assurance. The product possesses the given technical characteristics. Since all variations of end-using of the product can not be anticipated, the designer/end-user's responsibility to make sure of the suitability of this product for particular purposes, structures.

**This technical datasheet is applied to products sold by Masterplast Kft. and valid until withdrawal or until modification.** Since this datasheet may be subject to revision, it is the responsibility of designer/end-user to make sure of possessing the latest version of the datasheet (\*see date of issuing). Most recent version of this datasheet can be also accessed under [www.masterplastgroup.com](http://www.masterplastgroup.com). Modification of the technical datasheet repeals the previously issued versions!